

System SKU: SY318




PRODUCT SPECIFICATION:

- Opening angle: 105
- Closing type: Soft close
- Application: Frameless
- Diameter of hinge cup: 35mm
- Height of hinge cup: 11.5mm
- Boring distance range: 3-7mm
- Distance of cup holes centers: 45mm
- Door thickness: 14-21mm
- Finishing: Nickel plated
- Main material: Cold-rolled steel
- Material thickness: 0.8-1.2-1.2mm

**KCMA-BIFMA-BHMA
CERTIFIED GRADE - 1**


CLIP-ON SOFT-CLOSE 3D HINGES

Full Overlay




D	H	K	3	4	5	6	7
0			16	17	18	19	20

Half Overlay




D	H	K	3	4	5	6	7
0			7	8	9	10	11

Inset




D	H	K	3	4	5	6	7
0			-1	0		2	3


Hinges per door

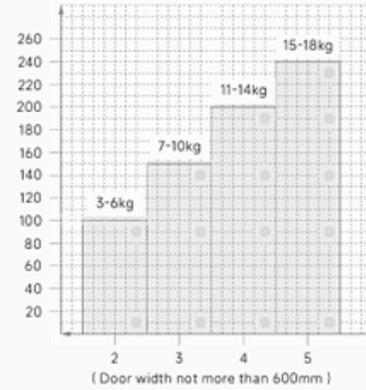


Dimension of hinge cup

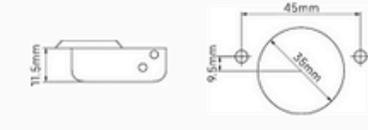

Door adjustment

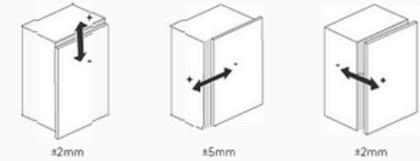

Mounting-plate



Pattern	H Value	Type
Two holes	H=0	Clip-on



0 mm Cam Adjustment Steel Plate for Frameless Hinges
0 mm Cam Adjustment Steel Plate with Euro Screws for Frameless Hinges

PRODUCT NAME	SKU
Full Overlay, Screw-on(45mm Hole Pitch)	318-01-45F
Half Overlay, Screw-on (45mm Hole Pitch)	318-01-45H
Inset Overlay, Screw-on (45mm Hole Pitch)	318-01-45IN
Full Overlay, With Dowel (45mm Hole Pitch)	318-02-45F
Half Overlay, With Dowel (45mm Hole Pitch)	318-02-45H
Inset Overlay, With Dowel (45mm Hole Pitch)	318-02-45IN